


Specification Sheet

Foamstream — M1200 —

The Foamstream M1200 was designed with high-performance in mind, providing its owner with a lower cost of operation than the M600. It delivers a high flow rate of 12 litres per minute and faster speed of treatment than the M600 – it also comes with larger water capacity as standard. Particularly well suited to treating large open areas in urban and rural environments quickly and efficiently when treatment time is a key consideration. Mountable on a pick-up, flatbed truck or trailer. Includes additional functionality for sanitisation, street cleaning, gum removal and power washing.

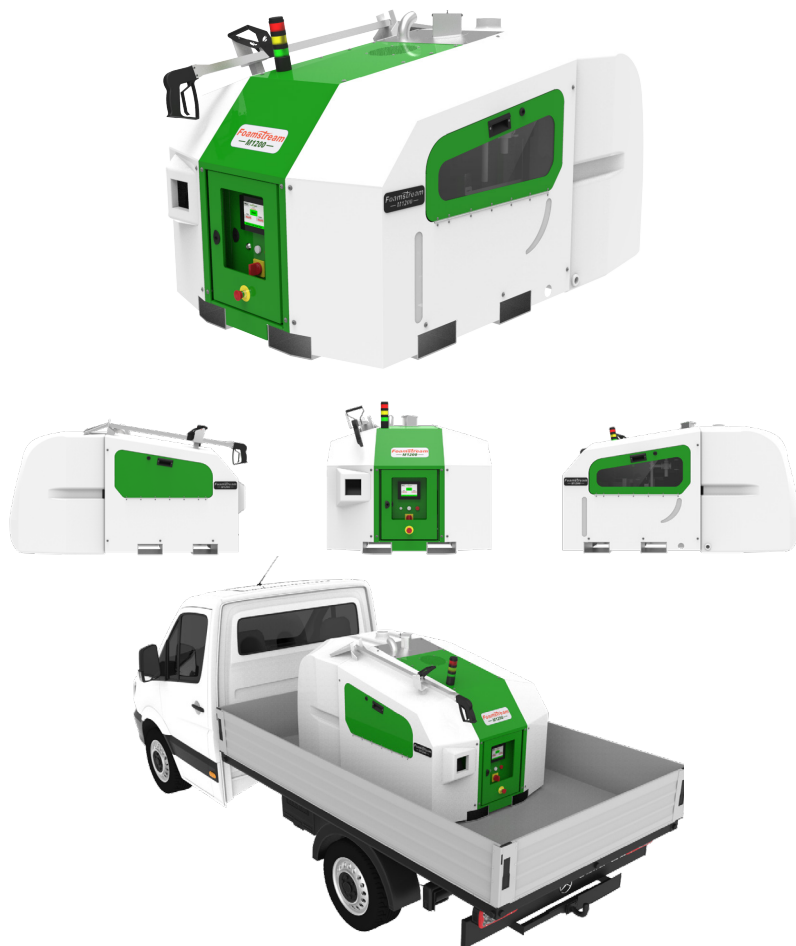

MACHINE MEASUREMENTS	
HEIGHT	1200 mm
WIDTH	1206 mm
DEPTH	1250 mm
DEPTH + STANDARD TANK	2120 mm
WEIGHT DRY UNIT	326 kg
WEIGHT WET UNIT	400 kg
GENERATOR	Hatz 1B30 EPA Tier 4/CARB 230 V 60 Hz 6 kVA
EMISSIONS CLASS	EURO 5 equivalent
BOILER	95 kWh diesel powered, 230V 50 Hz with double stage pump, 200 bar stainless steel coil (1/2").
BOILER EFFICIENCY	93%
LANCE WEIGHT	2.5 kg
HOSE LENGTH	30 m
OPERATING MEASUREMENTS	
INTERNAL OPERATING TEMPERATURE	98 °C
OPERATING TEMPERATURE AT LANCE	98 °C
OVER-TEMPERATURE CUTOFF	120 °C
WEED CONTROL LANCE PRESSURE	1 bar (atmospheric)
CLEANING LANCE PRESSURE	20 – 25 bar
FLOW RATE AT LANCE (per minute)	12 L
OPERATING NOISE LEVEL AT 1 m	< 95 dB
OPERATING NOISE LEVEL AT 5 m	< 82 dB
CONSUMABLE MEASUREMENTS	
FUEL TANK CAPACITY - DIESEL	52 L
GENERATOR / PUMP OIL	SAE 5W40
GENERATOR OIL CAPACITY	1.2 L
PUMP OIL CAPACITY	0.3 L
WATER TANK CAPACITY	780 L
FOAM TANK CAPACITY	22 L
FOAM JUG GROSS WEIGHT	26 kg
FOAM CAPACITY WEIGHT	25 kg
FOAM STORAGE TEMP. REQUIRED	5-40 °C
OUTPUT PER HOUR : 100% COVERAGE	
LOW VEGETATION DENSITY	700 m ²
HIGH VEGETATION DENSITY	420 m ²
TIME TAKEN TO TREAT 1 ACRE (HOURS)	< 6

